



Projectiles


- Projectiles
 - Spin Effect

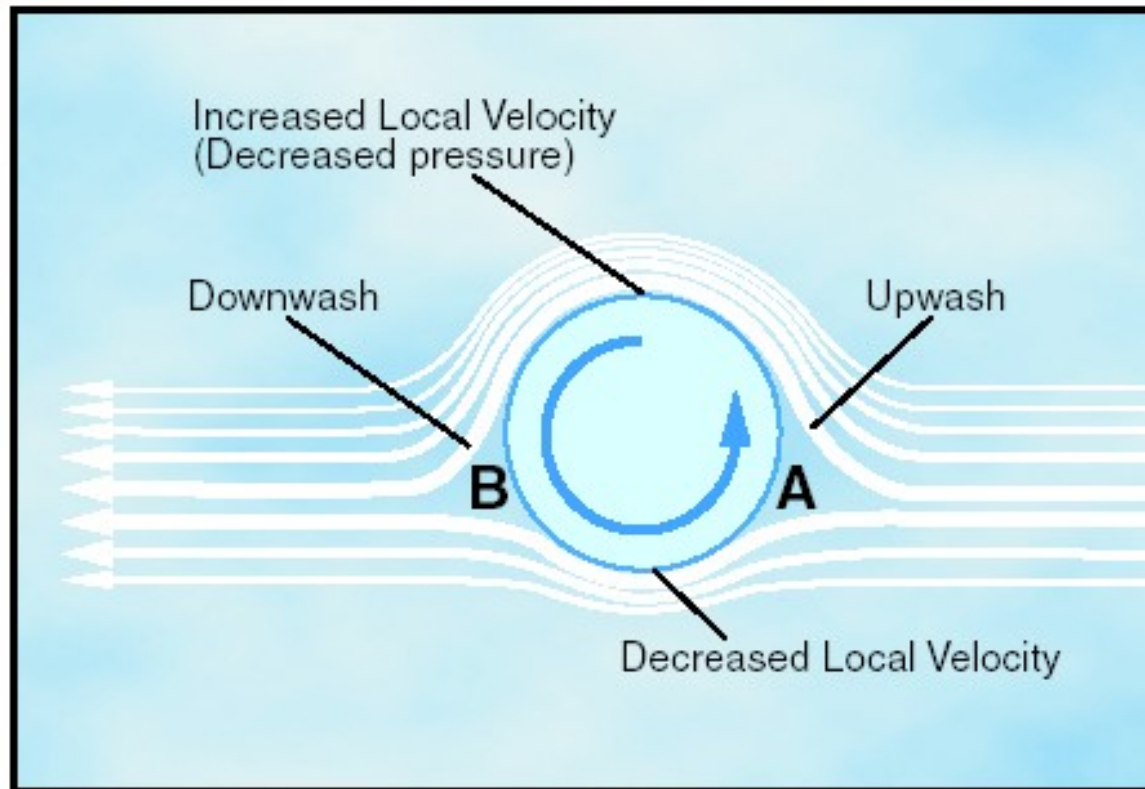

Projectiles



- Spin Effect
 - Golf Game Version 4

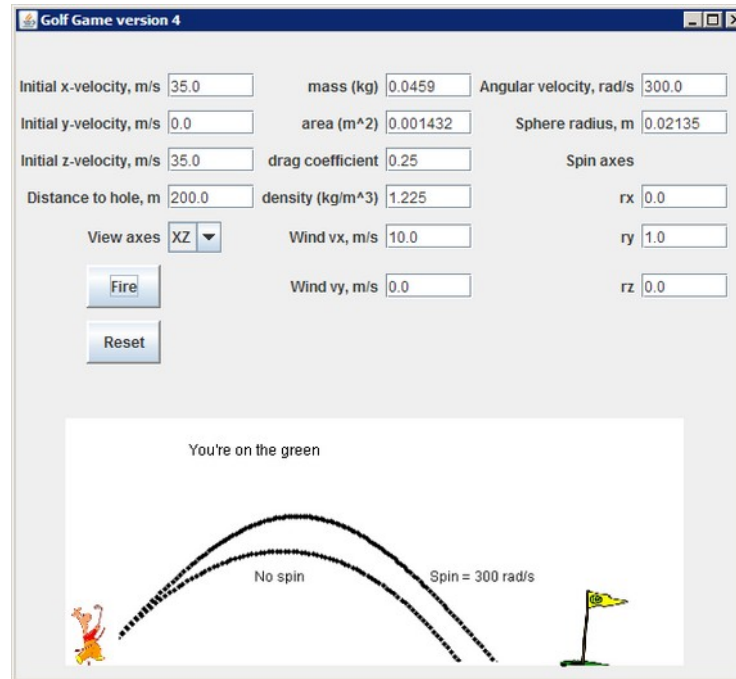


The effect of spin on golf ball flight

...Java_Code\Chapter05_Projectile\GolfGame4.java (<https://ae.onliu.se/tsbk03>)

Projectiles



- Spin Effect
 - Golf Game Version 4

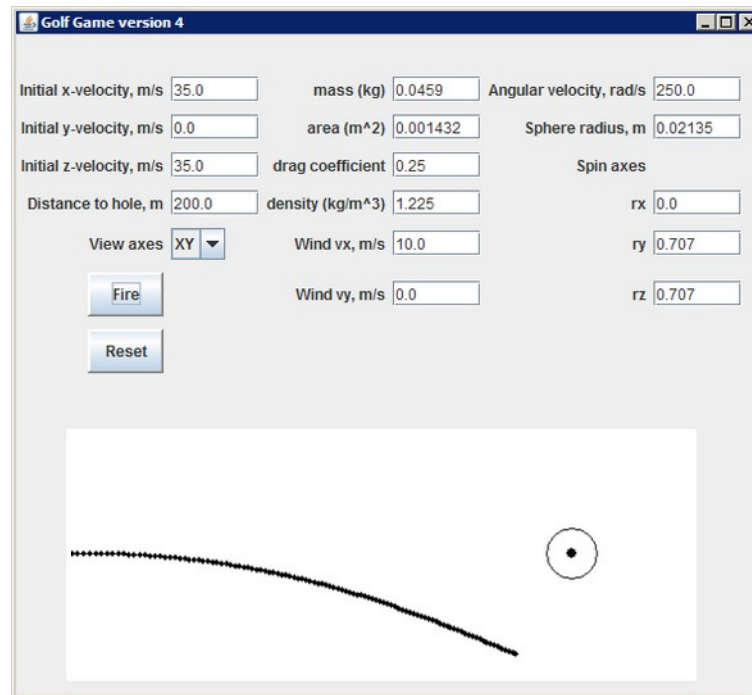

A tilt in the spin axis causes the ball to curve

...Java_Code\Chapter05_Projectile\GolfGame4.java (<https://ae.onliu.se/tsbk03>)

Projectiles



■ Spin Effect

- **Summary:**

- An object given backspin will generate a lifting force. An object given topspin will generate a force that will push the object downwards.
 - The acceleration that results from Magnus force is inversely proportional to mass. A heavier object will experience less acceleration than a similar, lighter object.
 - The magnitude of Magnus force depends on the geometry. All other things being equal, larger objects will generate a larger Magnus force than will smaller objects.
-

Projectiles




Results:

- 1) Gravity only $V_x=28\text{m/s}$
 - 2) Aeroresistance $V_x=62\text{ m/s}$
 - 3) Wind $+10\text{m/s}$ $V_x=46\text{m/s}$
 -10m/s $V_x=86\text{m/s}$
 - 4) Spin, Magnus force up
Wind $+10\text{m/s}$ $V_x=36\text{m/s}$
 -10m/s $V_x=72\text{m/s}$
Spin, Magnus force down
Wind $+10\text{m/s}$ $V_x=87\text{m/s}$
 -10m/s $V_x=145\text{m/s}$
-


Projectiles



- **Details on Specific Types of Projectiles**
 - **Bullets**

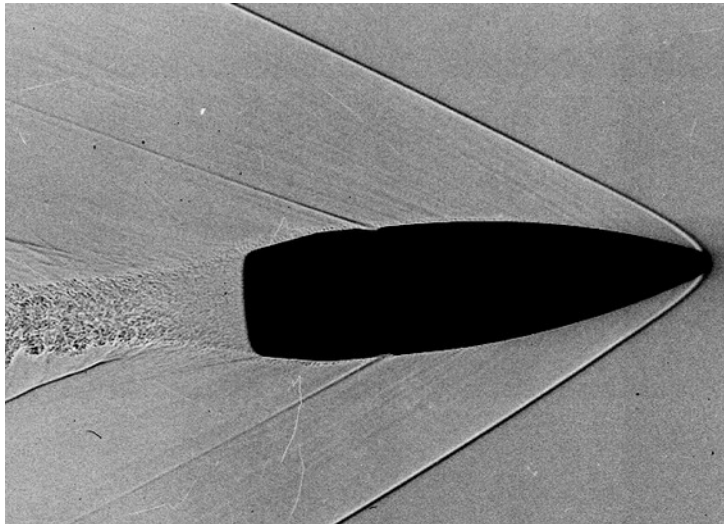

Shadowgraph of .308 Winchester FMJ bullet traveling at approximately 850 m/s (from www.nennstiel-ruprecht.de)

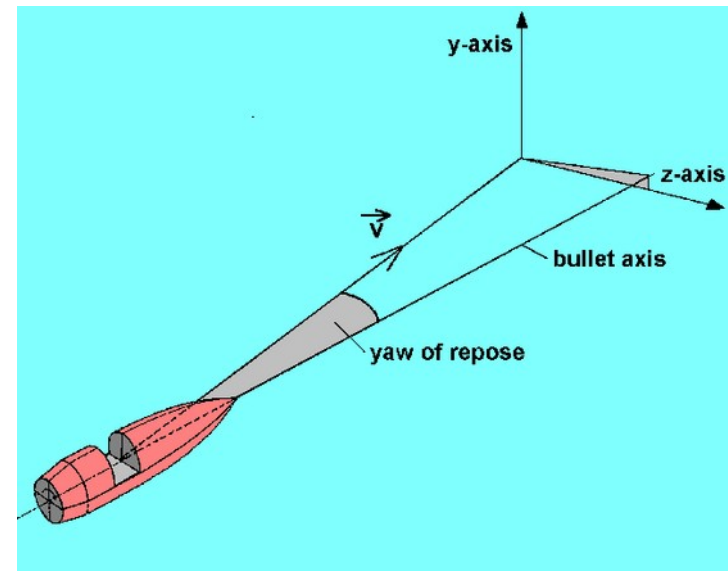


Bullets usually have a yaw angle during flight





Projectiles

Trajectory of bullets

Elements of a trajectory

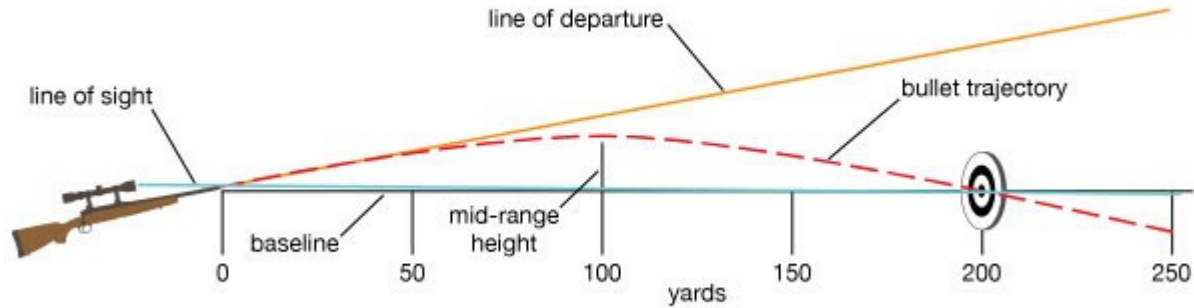

© Encyclopædia Britannica, Inc.

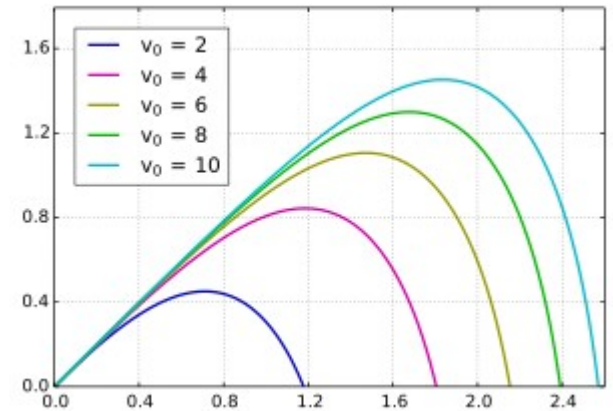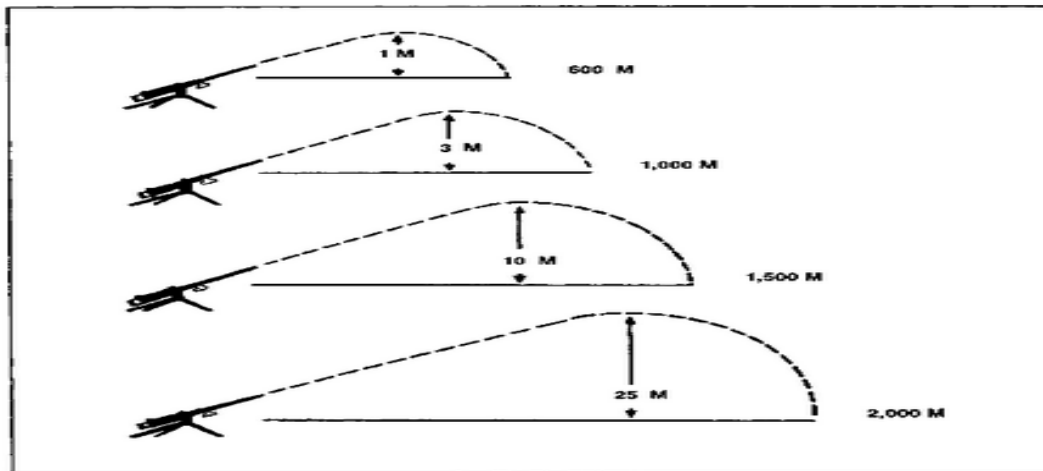

Projectiles




- **Details on Specific Types of Projectiles**
 - **Bullets**

Bullet	Muzzle Velocity (<i>m/s</i>)	Mass (<i>gm</i>)	Diameter (<i>mm</i>)
.22 Long rifle round nose	330	2.6	5.6
.32 ACP FMJ round nose	262	4.7	7.84
.357 Magnum	506	7.3	9
.38 ACP FMJ round nose	322	6.2	9.7
9 <i>mm</i> FMJ	341–373	8.0	9
9 <i>mm</i> FMJ high velocity	436	8.2	9
.44 Magnum	436	15.6	11.2
M74 (5.45 <i>mm</i>)	917	3.44	5.64
M80 (7.62 <i>mm</i> FMJ)	877	9.5	7.82
M2 .30 armor piercing	869	10.8	7.7

Projectiles




Underwater weapon

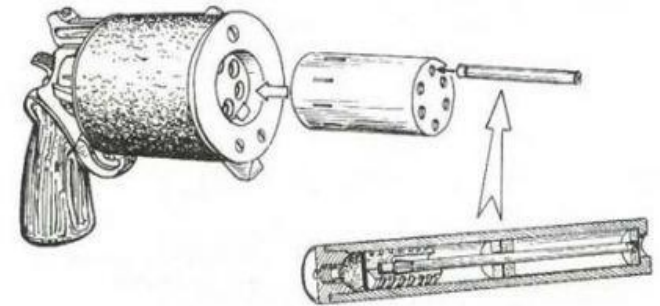

Projectiles

- Underwater bullets

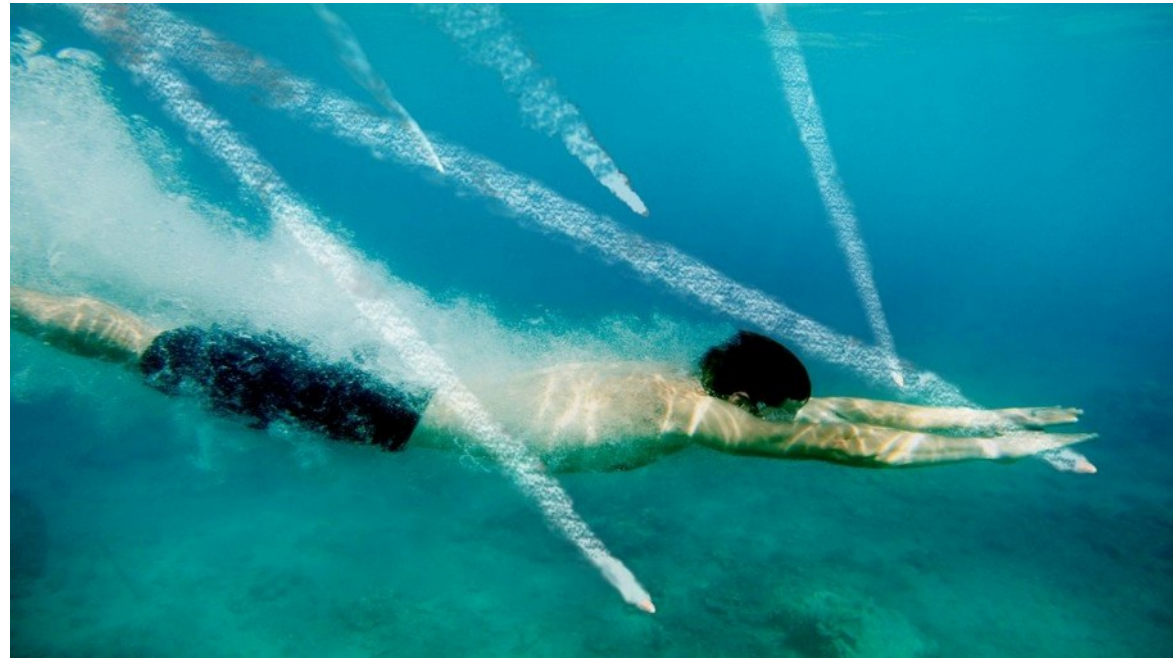


Collisions



- **Specific topics**
 - **Linear momentum and impulse**
 - **Conservation of linear momentum**
 - **Two-body linear collisions**
 - **Elastic and inelastic collisions**
 - **Determining when a collision occurs**
 - **Angular momentum and impulse**
 - **Conservation of angular momentum**
 - **General two-body collisions**
-

Collisions

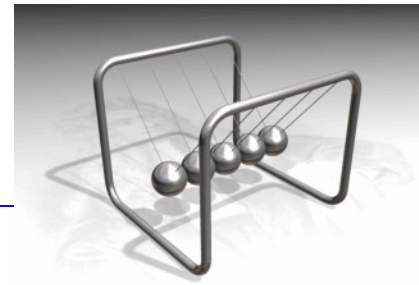



■ Linear momentum and impulse

The linear momentum $\vec{P} = m \vec{v}$

Newton's 2nd law $\vec{F} = \frac{d\vec{P}}{dt}$


Conservation of Linear Momentum $\sum_i \vec{P}_i = \text{const}$

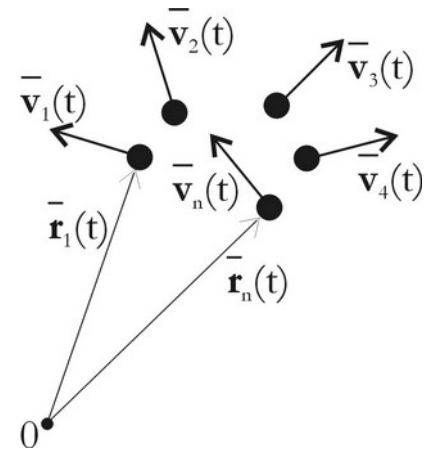

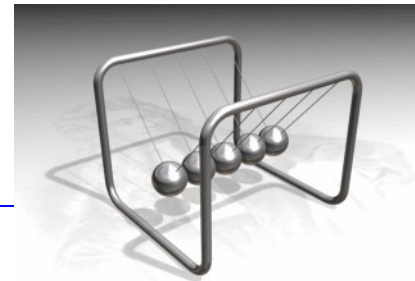

Collisions



■ Elastic Collisions

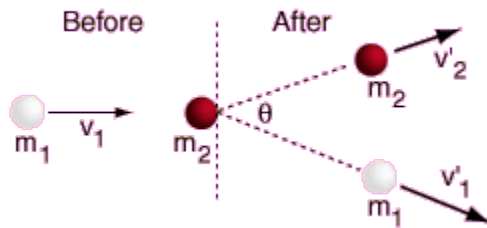



A perfectly elastic collision is defined as one in which there is no loss of kinetic energy in the collision.

$$\sum_i \frac{m_i^- v_i^-^2}{2} = \sum_i \frac{m_i^+ v_i^+^2}{2}$$

Before After

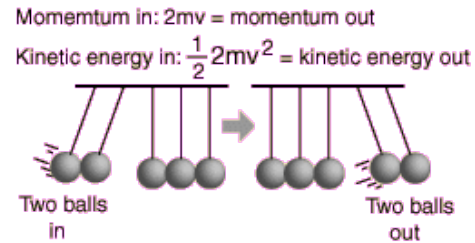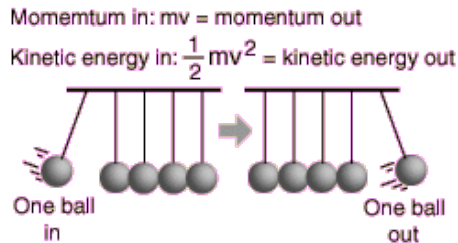

Collisions

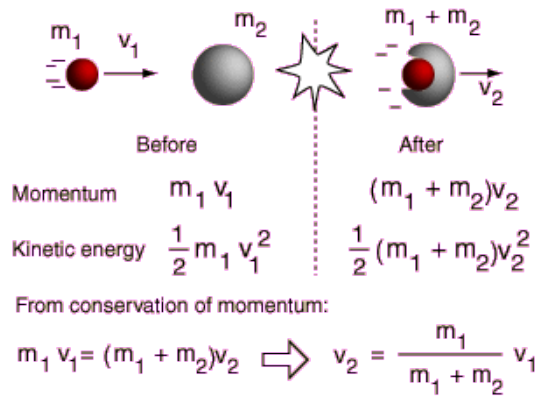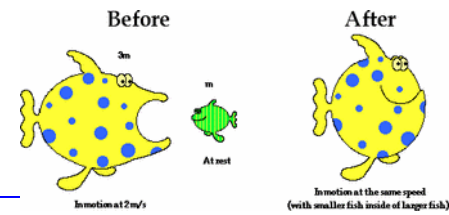


Ratio of kinetic energies before and after collision:

$$\frac{KE_f}{KE_i} = \frac{m_1}{m_1 + m_2}$$

Fraction of kinetic energy lost in the collision:

$$\frac{KE_i - KE_f}{KE_i} = \frac{m_2}{m_1 + m_2}$$

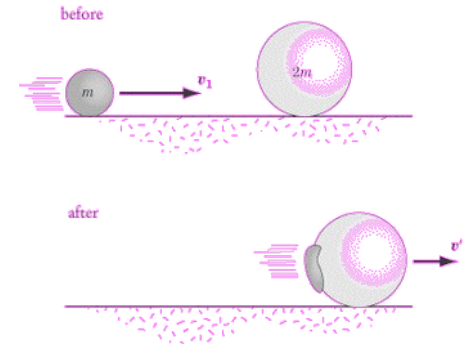

An inelastic collision is one in which part of the kinetic energy is changed to some other form of energy in the collision

$$\sum_i \frac{m_i^- v_i^-^2}{2} > \sum_i \frac{m_i^+ v_i^+^2}{2}$$

Before the collision


After the collision




Collisions

■ Elastic and Inelastic Collisions



coefficient of restitution $e = \frac{|\vec{v}_{1^+} - \vec{v}_{2^+}|}{|\vec{v}_{1^-} - \vec{v}_{2^-}|} \quad 0 \leq e \leq 1$

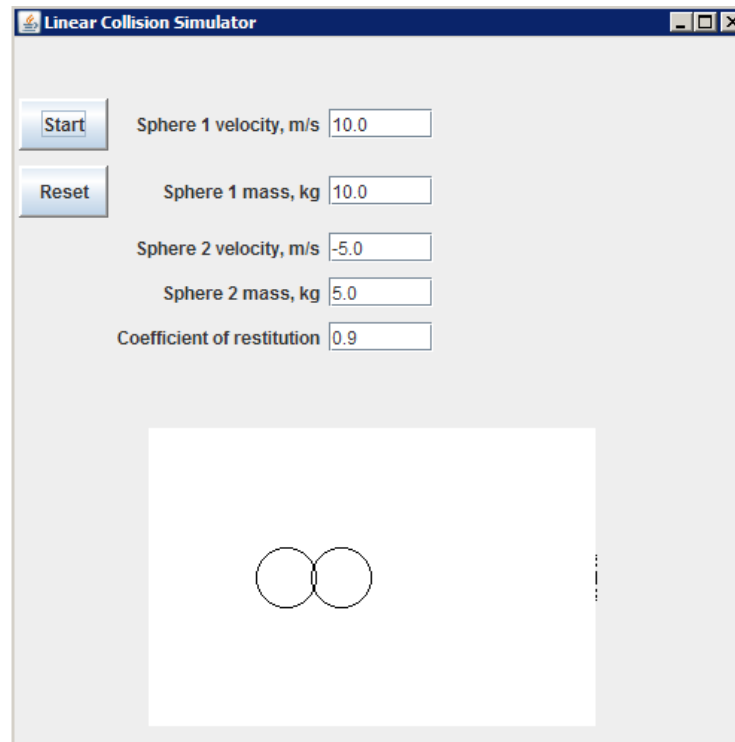


Collisions




■ Elastic Collisions

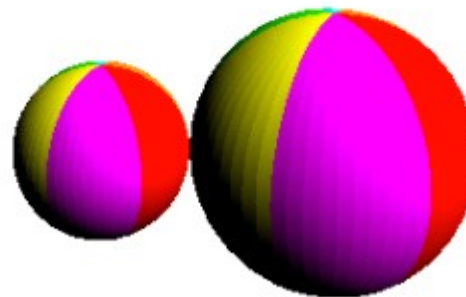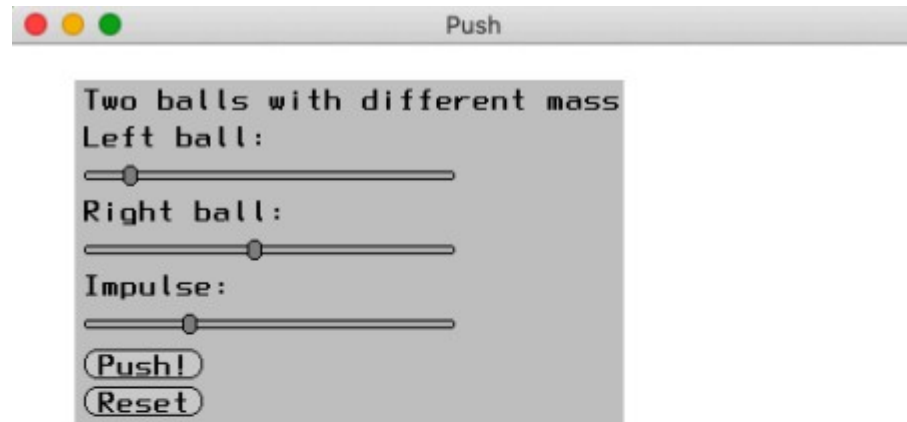

Collisions




■ Elastic Collisions

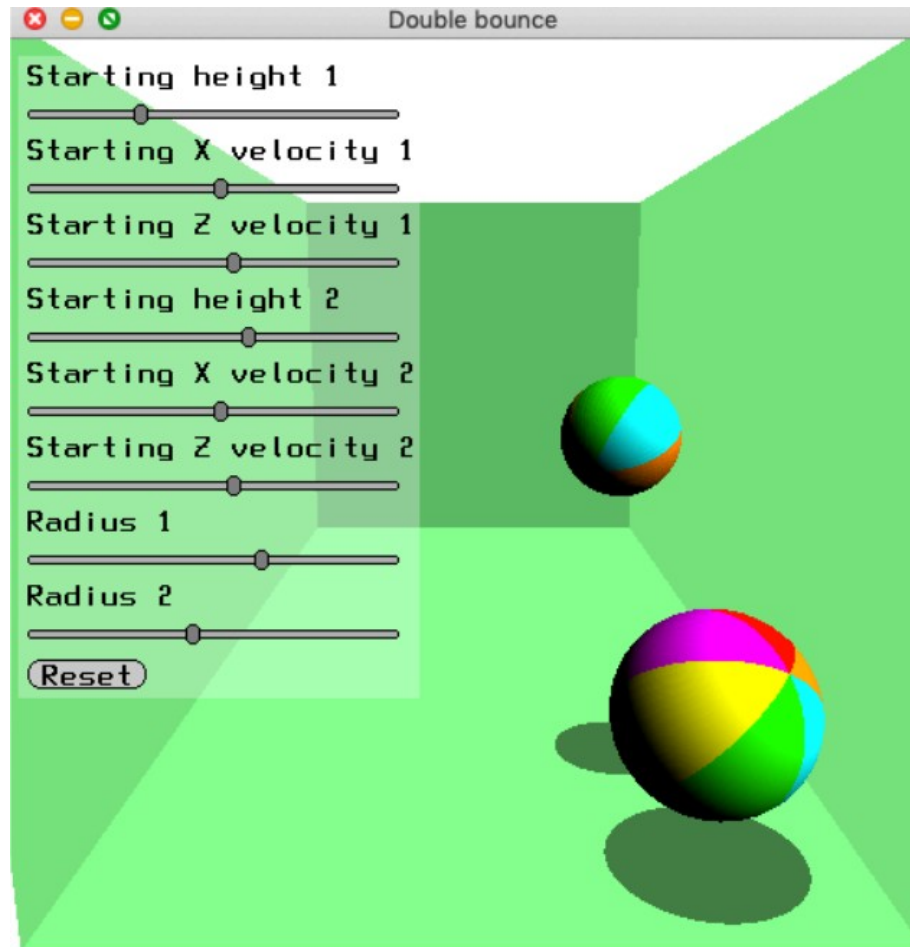

Collisions




■ Inelastic Collisions

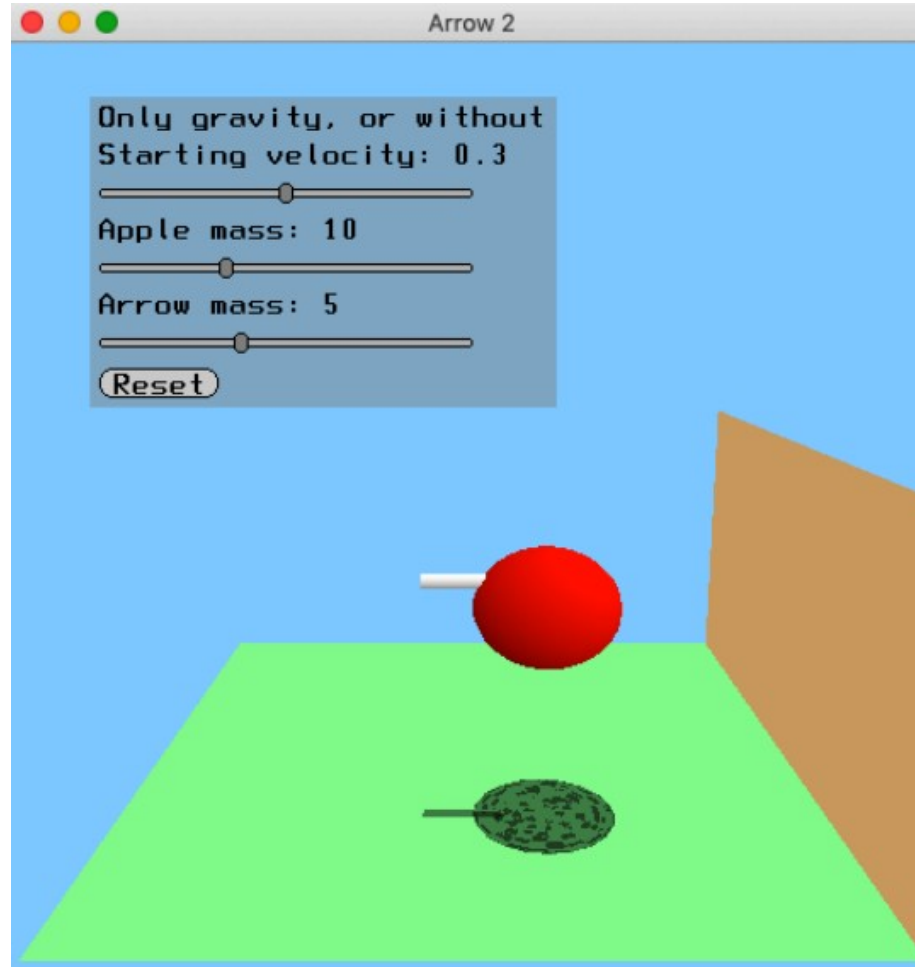

Collisions

- Collision detection

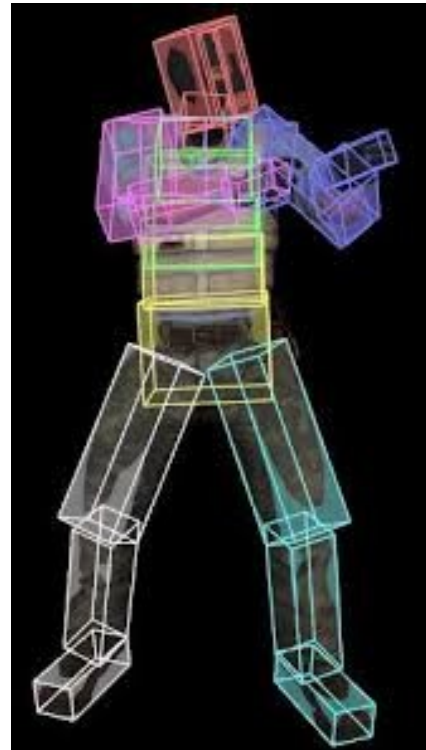


Collisions




■ Collision detection

- Separating axis

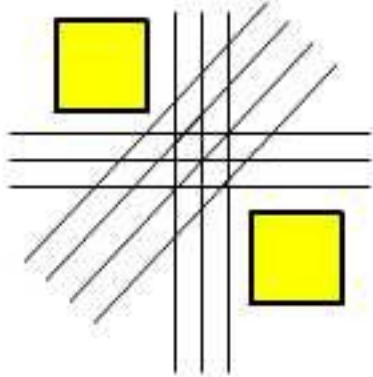

if you are able to draw a line to separate two polygons, then they do not collide.

Projection Along an Arbitrary Axis

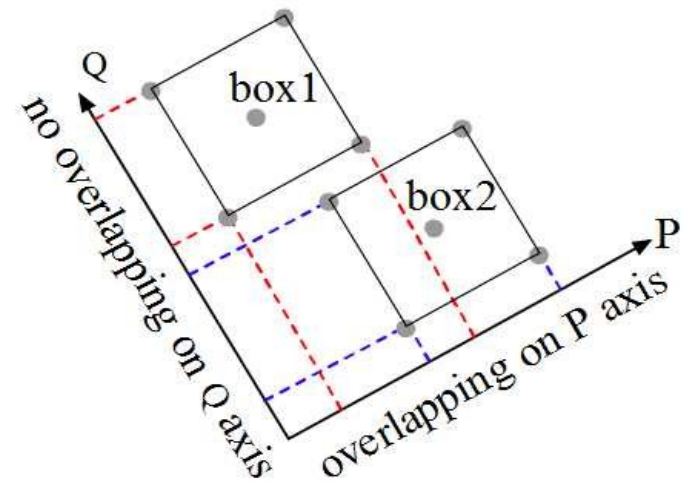


Collisions



■ Collision detection

- Gilbert-Johnson-Keerthi (GJK) algorithm
 - Support mapping

$$SA(v) = p_i \text{ where } i \text{ maximizes } v \cdot p_i$$

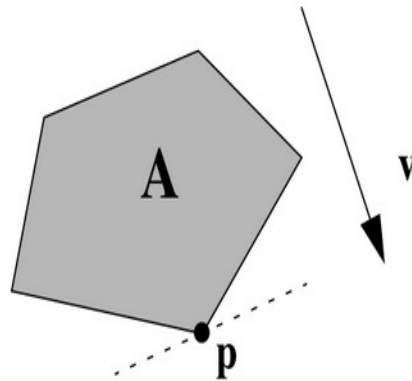

The support mapping of the shape A along the vector v is the point p


Collisions



Collision detection

- Gilbert-Johnson-Keerthi (GJK) algorithm
 - Minkowski Addition

$$A + B = \{\mathbf{x} + \mathbf{y} : \mathbf{x} \in A, \mathbf{y} \in B\}.$$

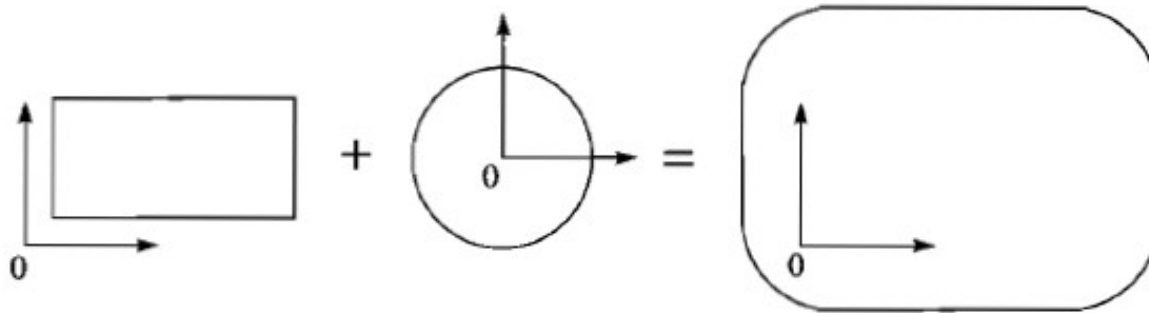


The Minkowski sum of a box and a sphere.




Collisions

Collision detection

- Gilbert-Johnson-Keerthi (GJK) algorithm

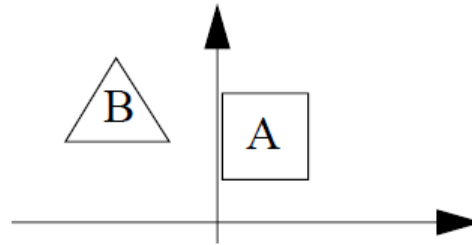

The two shapes for our GJK example.

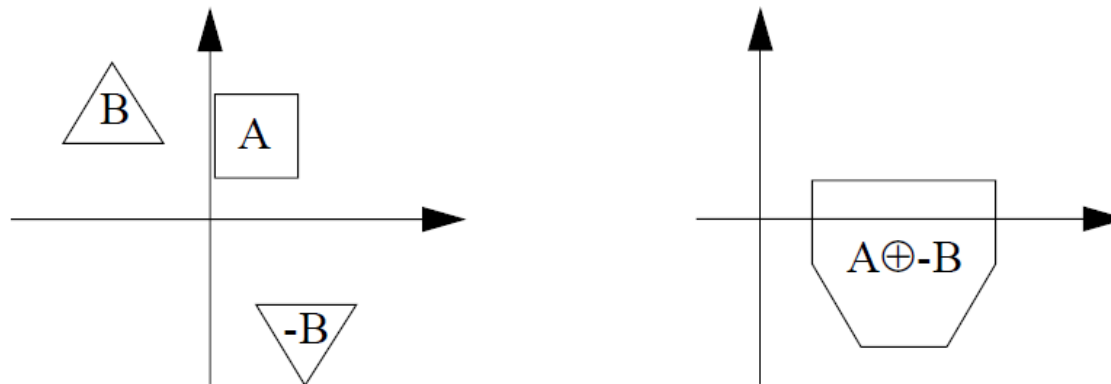


The negated shape $-B$ and the Minkowski sum $A \oplus (-B)$.



Collisions

Collision detection

- Gilbert-Johnson-Keerthi (GJK) algorithm
 - Minkowski "difference" (Configuration space obstacle (CSO))

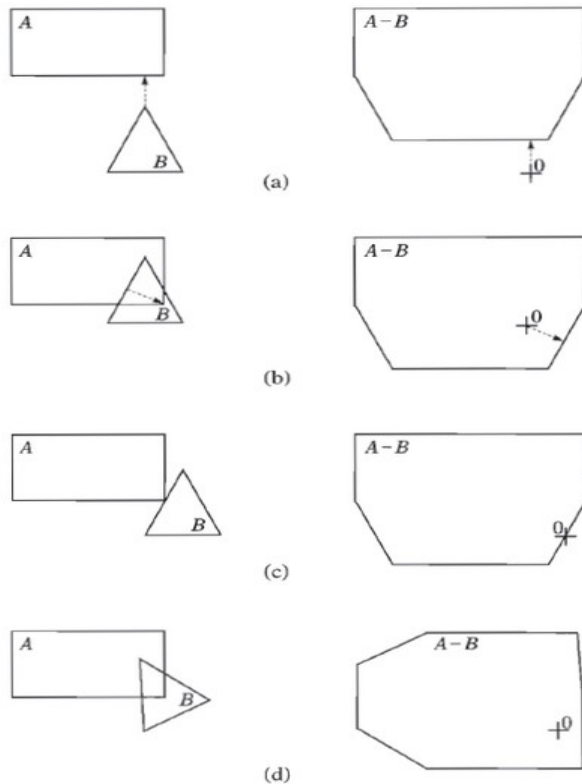

A pair of convex objects and the corresponding CSO. (a) Nonintersecting: The origin is outside the CSO. The arrow denotes the distance. (b) Intersecting: The origin is inside the CSO. The arrow denotes the penetration depth. (c) After a translation of B over the penetration depth vector, the objects are in contact. The origin lies on the boundary of the CSO. (d) After a rotation of B , the shape of the CSO changes.


Collisions



■ Collision detection

- Gilbert-Johnson-Keerthi (GJK) algorithm

$$S_{A \oplus -B}(\mathbf{p}_0) = S_A(\mathbf{p}_{0A} - \mathbf{p}_{0B}) - S_B(\mathbf{p}_{0B} - \mathbf{p}_{0A}) = S_A(\mathbf{v}) - S_B(-\mathbf{v})$$

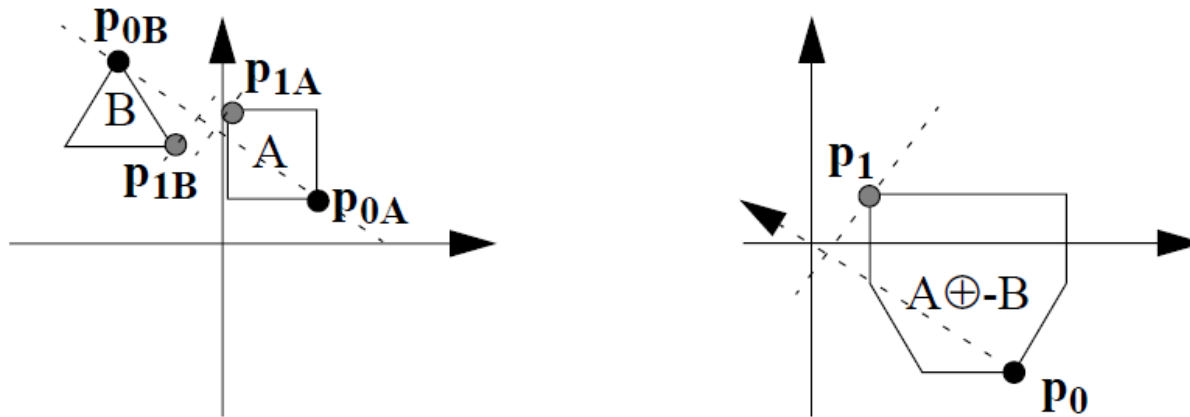


The first step of the GJK algorithm, on separate objects (left) and combined (right)

Collisions



■ Collision detection

- Gilbert-Johnson-Keerthi (GJK) algorithm

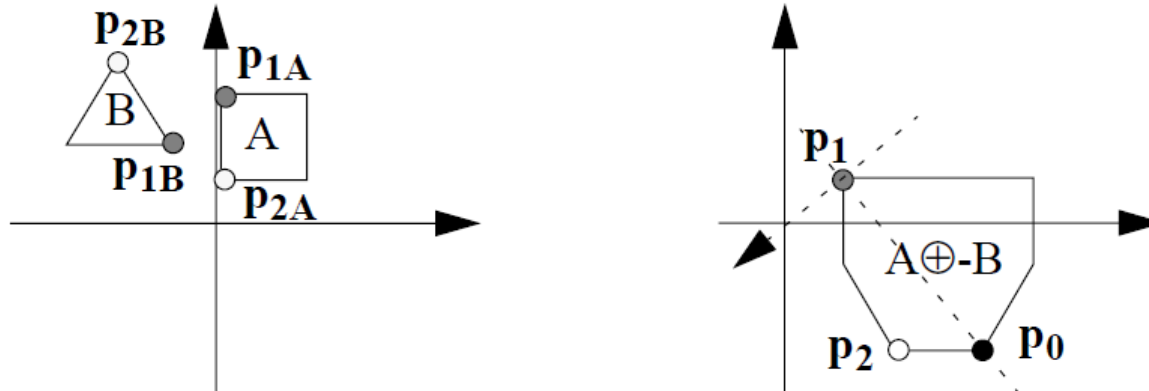


The first step of the GJK algorithm, on separate objects (left) and combined (right)

Collisions



Collision response

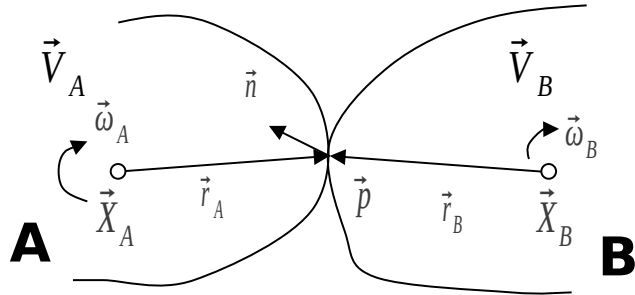

$$\vec{r}_A = \vec{p} - X_A(t) \quad \vec{r}_B = \vec{p} - X_B(t)$$

$$\vec{v}_{pA} = \vec{v}_A + \vec{\omega}_A \times \vec{r}_A \quad \vec{v}_{pB} = \vec{v}_B + \vec{\omega}_B \times \vec{r}_B$$

$$\vec{v}_{rel} = \vec{v}_{pA} - \vec{v}_{pB} \quad \vec{v}_{rel}^- = (\vec{v}_{pA} - \vec{v}_{pB}) \cdot \vec{n}$$

$$\vec{P}_{imp} = j \vec{n}$$

$$\vec{\omega}_A^+ = \vec{\omega}_A^- + \hat{I}_A^{-1} [\vec{r}_A \times j \vec{n}] = \vec{\omega}_A^- + j \hat{I}_A^{-1} [\vec{r}_A \times \vec{n}]$$

$$\vec{\omega}_B^+ = \vec{\omega}_B^- - \hat{I}_B^{-1} [\vec{r}_B \times j \vec{n}] = \vec{\omega}_B^- - j \hat{I}_B^{-1} [\vec{r}_B \times \vec{n}]$$

$$\begin{aligned} v_{rel}^+ &= (\vec{v}_{pA}^+ - \vec{v}_{pB}^+) \cdot \vec{n} = (\vec{v}_A^+ + \vec{\omega}_A^+ \times \vec{r}_A - \vec{v}_B^+ - \vec{\omega}_B^+ \times \vec{r}_B) \cdot \vec{n} = \\ &= v_{rel}^- + j \left(\vec{n} / m_A + \hat{I}_A^{-1} [[\vec{r}_A \times \vec{n}] \times \vec{r}_A] + \vec{n} / m_B + \hat{I}_B^{-1} [[\vec{r}_B \times \vec{n}] \times \vec{r}_B] \right) \cdot \vec{n} \end{aligned}$$

$$-(\varepsilon + 1) v_{rel}^- = j / m_A + j / m_B + j \left(\hat{I}_A^{-1} [[\vec{r}_A \times \vec{n}] \times \vec{r}_A] + \hat{I}_B^{-1} [[\vec{r}_B \times \vec{n}] \times \vec{r}_B] \right) \cdot \vec{n}$$

$$j = \frac{-(\varepsilon + 1) v_{rel}^-}{1/m_A + 1/m_B + \left(\hat{I}_A^{-1} [[\vec{r}_A \times \vec{n}] \times \vec{r}_A] + \hat{I}_B^{-1} [[\vec{r}_B \times \vec{n}] \times \vec{r}_B] \right) \cdot \vec{n}}$$

Collisions



The Simulation Loop Pseudocode

```
while(simulating) {
  DeltaTime = CurrentTime - LastTime
  while(LastTime < CurrentTime) {
    calculate all forces and torques @ LastTime+DeltaTime
    compute linear and angular accelerations @ LastTime+DeltaTime
    integrate accelerations and velocities over DeltaTime @ LastTime+DeltaTime
    if(objects are interpenetrating) { subdivide DeltaTime}
    else {
      if(objects are colliding) {
        resolve collisions using Eqs}
      LastTime = LastTime + DeltaTime
      DeltaTime = CurrentTime - LastTime
      update positions and velocities
    }
  }
  draw objects in current positions
}
```

Collisions



Curved Objects

myPhysicsLab.com
English previous next

Sim Graph Time Graph Multi Graph

number of objects

thrust

gravity

damping

elasticity

show forces

show energy

show clock

pan-zoom

time step

time rate

Diff Eq Solver

potential energy offset

background

share

Collisions




Polygon Shapes

myPhysicsLab.com

Sim Graph Time Graph Multi Graph

English previous next

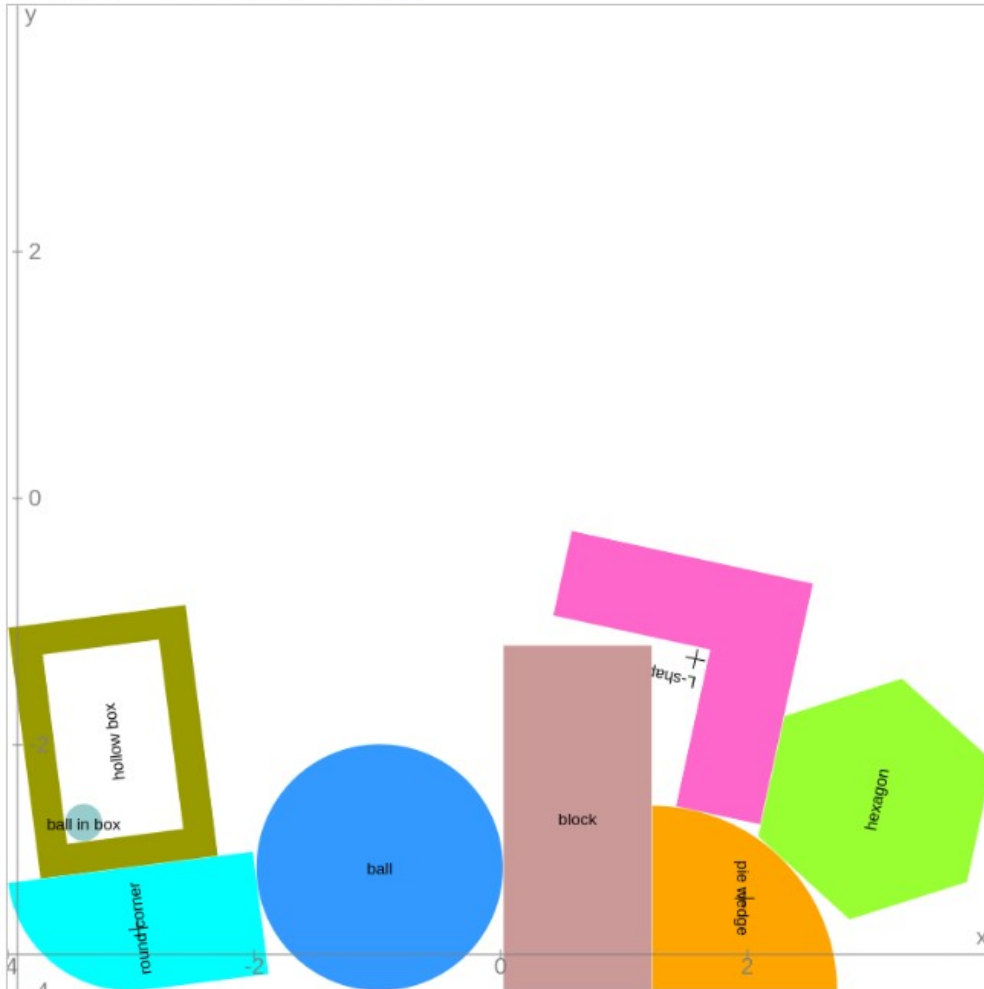

number of objects

thrust

gravity

damping

elasticity

show forces

show energy

show clock

pan-zoom

time step

time rate

Diff Eq Solver

potential energy offset


background

terminal

Collisions




When two objects collide obliquely, they will slide against each other for a brief period of time.

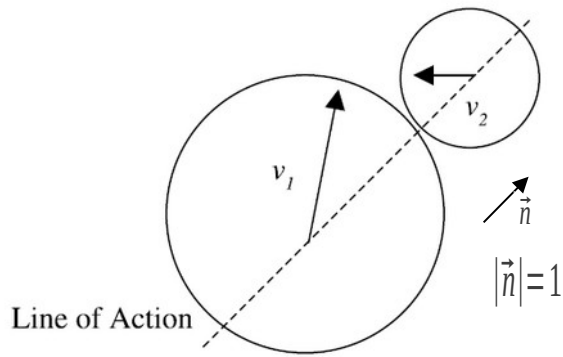

The frictional impulse $\hat{F}_\mu = \mu \vec{n} \cdot (\vec{P}_b - \vec{P}_a)$

$$\hat{F}_\mu = -\frac{\hat{I}_1 \Delta\omega_1}{r_1} \quad \hat{F}_\mu = -\frac{\hat{I}_2 \Delta\omega_2}{r_2}$$

The frictional impulse acts in the direction normal to the line of action and causes rotations of the objects

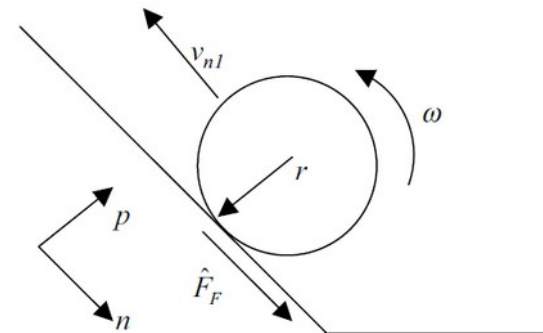

Collisions




■ Summary

- The change in velocity that results from a collision can be characterized by a linear or angular impulse.
 - The post-collision velocities of two objects after a collision can be determined from the principle of conservation of momentum and the coefficient of restitution for the collision.
 - For frictionless collisions, only the velocity in the direction of the line of action of a collision is affected by the collision. The other velocity components normal to the line of action are unchanged.
 - For collisions that involve friction, the resulting frictional impulse reduces the magnitude of the velocity in the direction normal to the line of action and causes the objects to spin.
-

Fluid dynamics



Example of a solution of the Euler (or Navier-Stokes) equation

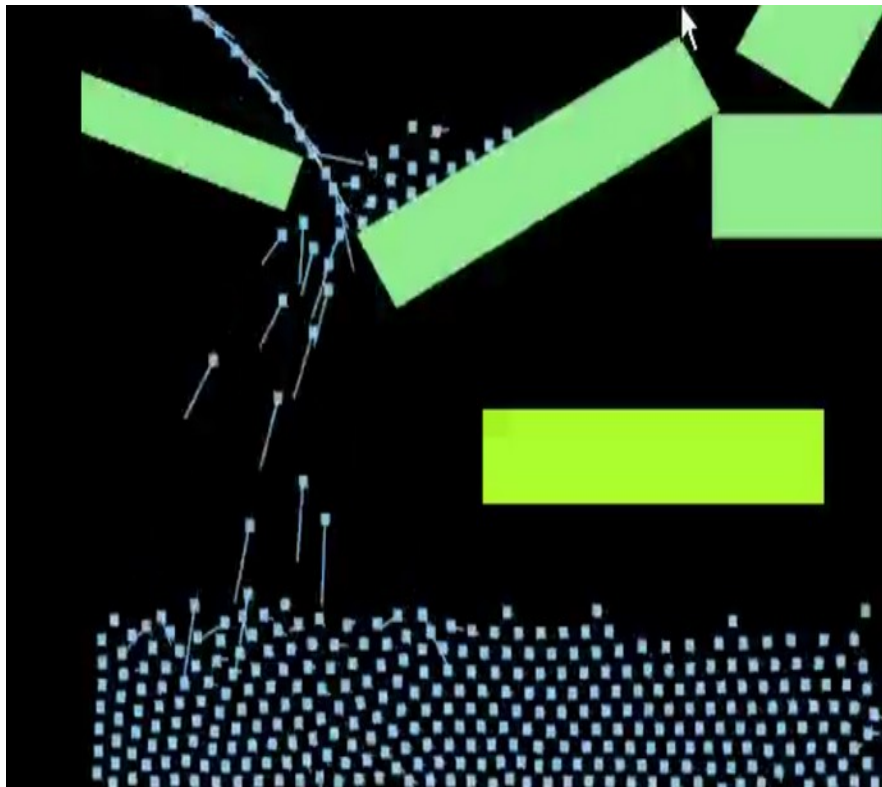

Fluid dynamics



Euler equations

**Mass
density**


$$\frac{\partial \rho}{\partial t} + \sum_{i=1}^3 \frac{\partial(\rho u_i)}{\partial x_i} = 0,$$

$$\frac{\partial(\rho u_j)}{\partial t} + \sum_{i=1}^3 \frac{\partial(\rho u_i u_j)}{\partial x_i} + \frac{\partial p}{\partial x_j} = 0,$$

$$\frac{\partial E}{\partial t} + \sum_{i=1}^3 \frac{\partial((E + p)u_i)}{\partial x_i} = 0,$$

Energy

**Velocity
components**

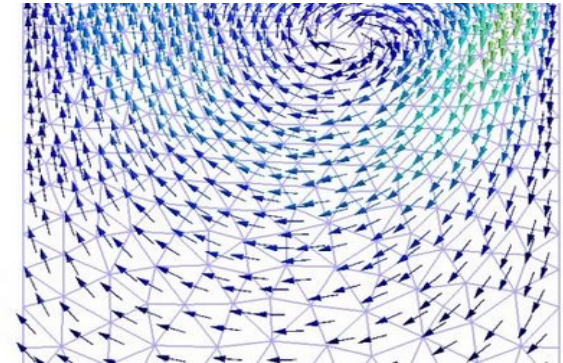


Pressure


Navier-Stokes equation

$$\frac{\partial \vec{v}}{\partial t} = -(\vec{v} \cdot \nabla) \vec{v} + \nu \Delta \vec{v} - \frac{1}{\rho} \nabla p + \vec{f},$$


Fluid dynamics

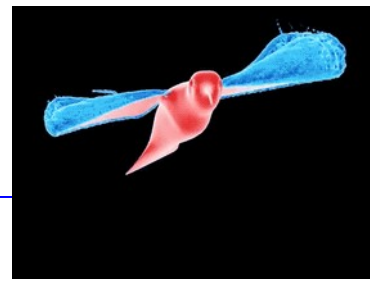

Example of a solution of the Navier-Stokes equation

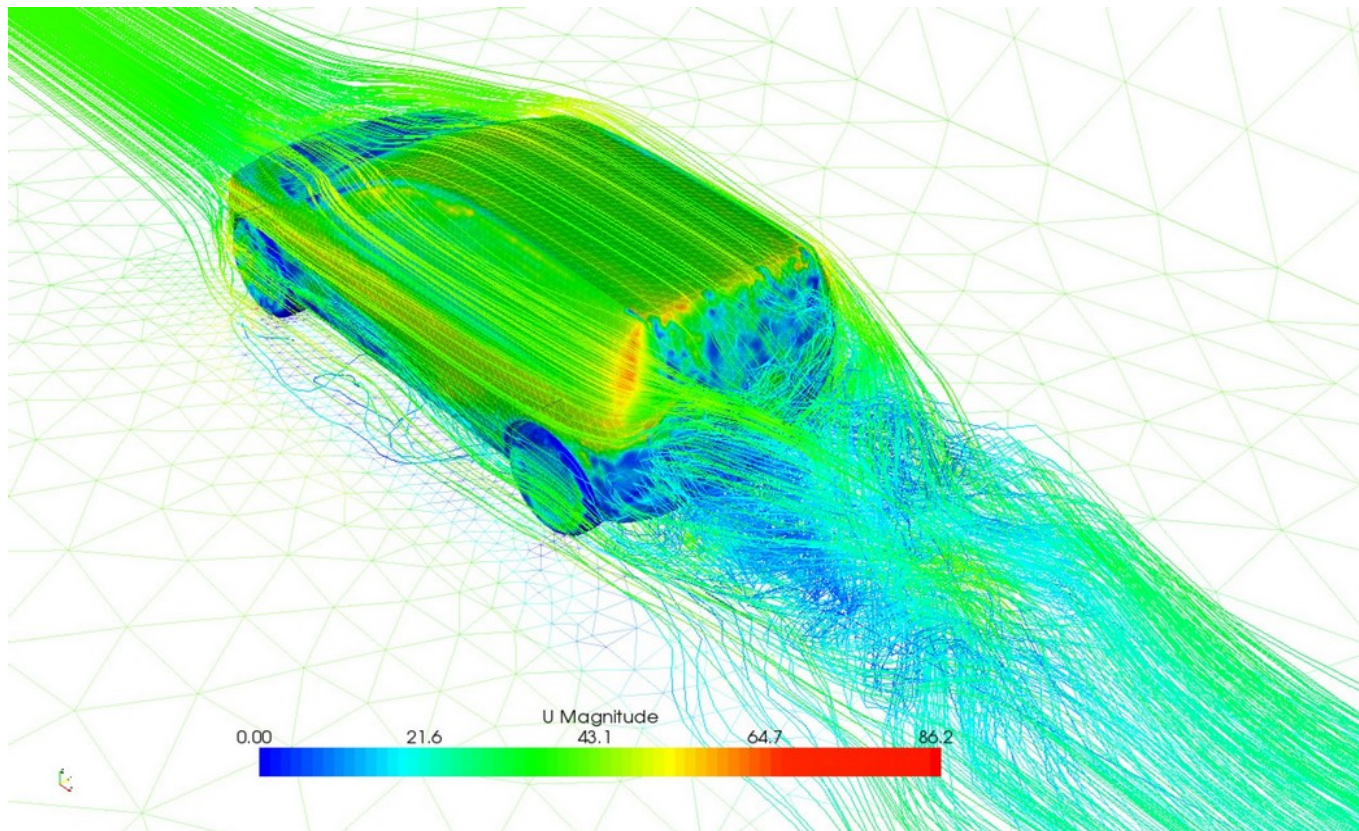

Fluid dynamics





Caustic (or caustic network) is the envelope of light rays reflected or refracted by a curved surface or object



Simulation of a liquid



Examples of caustics

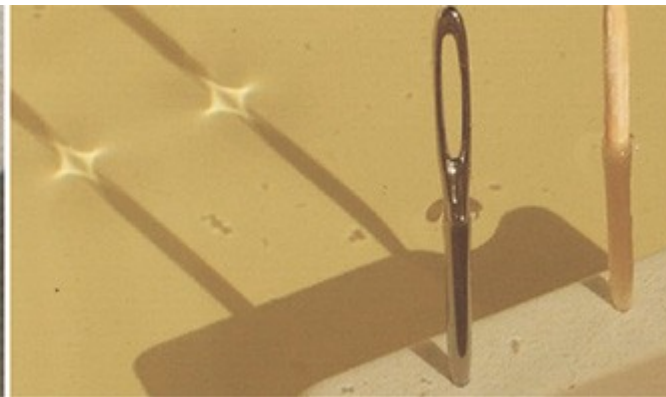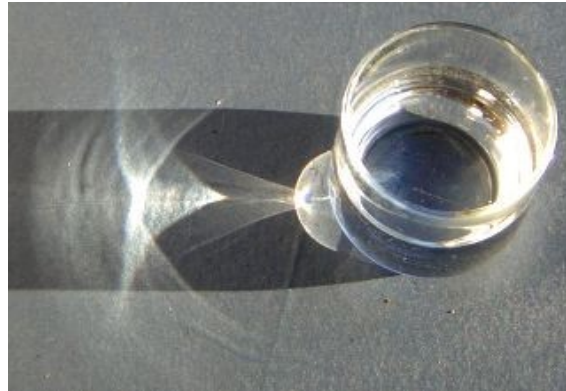

Simulation of a liquid



Continuity equation:

$$\rho_1 \mathbf{v}_1 \cdot \mathbf{S}_1 = \rho_2 \mathbf{v}_2 \cdot \mathbf{S}_2$$


Sports Simulations

■ Examples



- Golf
- Soccer
- Basketball
- Other games



Sports Simulations

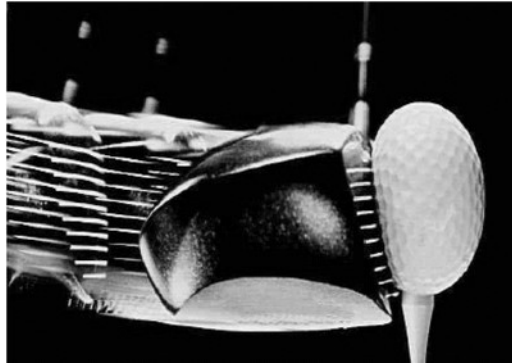

A model for simulation includes the mass of the club head, the mass of the ball, the velocity of the club head at impact, and the angle of the impact.

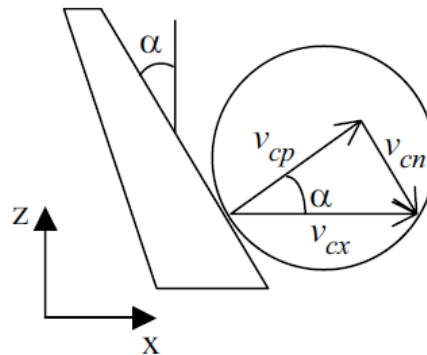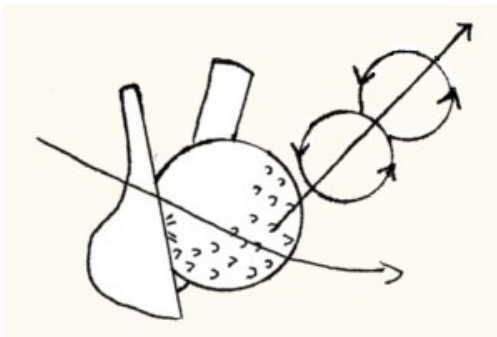

Schematic of a club head—golf ball collision

$$\vec{v}_{cp} = (\vec{v}_{Club} \cdot \vec{n}) \vec{n}$$

$$\vec{v}_{cn} = \vec{v}_{Club} - (\vec{v}_{Club} \cdot \vec{n}) \vec{n}$$

$$\vec{v}_{Ball}^+ = \left(\frac{(1+e)m_{Club}}{m_{Club} + m_{Ball}} \vec{v}_{Club}^- \cdot \vec{n} \right) \vec{n}$$





Sports Simulations

Golf Ball Specifications

Quantity	Two-Piece Ball	Three-Piece Ball
Mass	0.0459 kg (1.62 oz)	0.0459 kg (1.62 oz)
Diameter	0.0427 m (1.68 in)	0.0427 m (1.68 in)
Coefficient of restitution	0.78	0.68
Drag coefficient	0.21–0.25	0.22–0.35

A model for simulation includes the mass of the club head, the mass of the ball, the velocity of the club head at impact, and the angle of the impact.

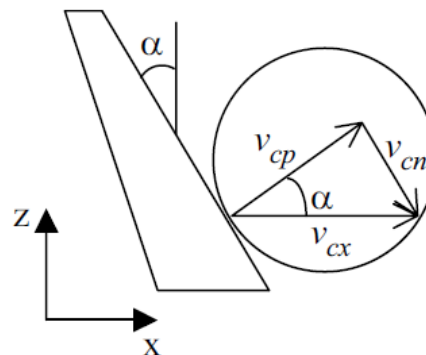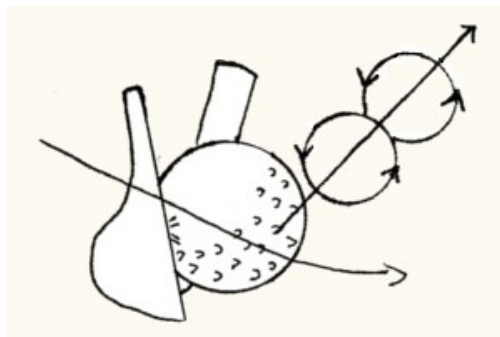

$$\vec{v}_{cp} = (\vec{v}_{Club} \cdot \vec{n}) \vec{n}$$

$$\vec{v}_{cn} = \vec{v}_{Club} - (\vec{v}_{Club} \cdot \vec{n}) \vec{n}$$

$$\vec{v}_{Ball}^+ = \left(\frac{(1+e)m_{Club}}{m_{Club} + m_{Ball}} \vec{v}_{Club}^- \cdot \vec{n} \right) \vec{n}$$

Schematic of a club head—golf ball collision

Sports Simulations



Golf


Golf Clubs Specifications

Club	Loft (Degrees)	Club Head Mass
1 wood	11	0.2 kg (7.05 oz)
3 wood	15	0.208 kg (7.34 oz)
5 wood	18	0.218 kg (7.69 oz)
2 iron	18	0.232 kg (8.18 oz)
3 iron	21	0.239 kg (8.43 oz)
4 iron	24	0.246 kg (8.67 oz)
5 iron	27	0.253 kg (8.92 oz)
6 iron	31	0.260 kg (9.17 oz)
7 iron	35	0.267 kg (9.42 oz)
8 iron	39	0.274 kg (9.66 oz)
9 iron	43	0.281 kg (9.91 oz)
Pitching wedge	48	0.285 kg (10.05 oz)
Sand wedge	55	0.296 kg (10.44 oz)
Putter	4	0.33 kg (11.64 oz)



Sports Simulations

- Golf
 - Friction Effects

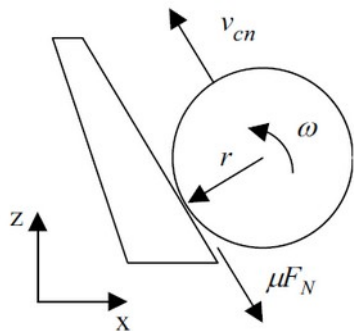

Friction between the ball and club face causes the ball to spin

The friction force does two things:

- 1) it reduces the relative velocity between the club and ball, and
- 2) it generates a torque on the ball that causes it to spin.

$$m(v_n^+ - v_n^-) = -\frac{I\omega^+}{r}$$

$$v_n^+ = r\omega^+$$

$$v_n^+ = \frac{v_n^-}{1 + \frac{I}{mr^2}}$$

$$I = \frac{2}{5}mr^2$$

$$v_n^+ = \frac{5}{7}v_n^- \quad \omega^+ = \frac{5v_n^-}{7r}$$

$$v_{Bx}^+ = v_{Cx}^- \frac{m_C}{m_C + m_B} \left((1+e) \cos^2 \alpha + \frac{2}{7} \sin^2 \alpha \right)$$


$$v_{Bz}^+ = v_{Cx}^- \frac{m_C}{m_C + m_B} \sin \alpha \cos \alpha \left(e + \frac{5}{7} \right)$$

Sports Simulations




- Golf
 - Modeling the Golf Ball in Flight

$$\vec{F}_M = C_L \rho \frac{v^2}{2} A \frac{[\vec{\omega} \times \vec{v}]}{||[\vec{\omega} \times \vec{v}]||}$$

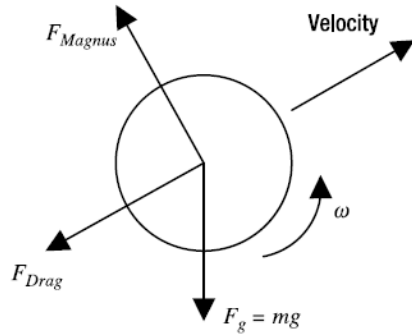

Force diagram for a golf ball in flight

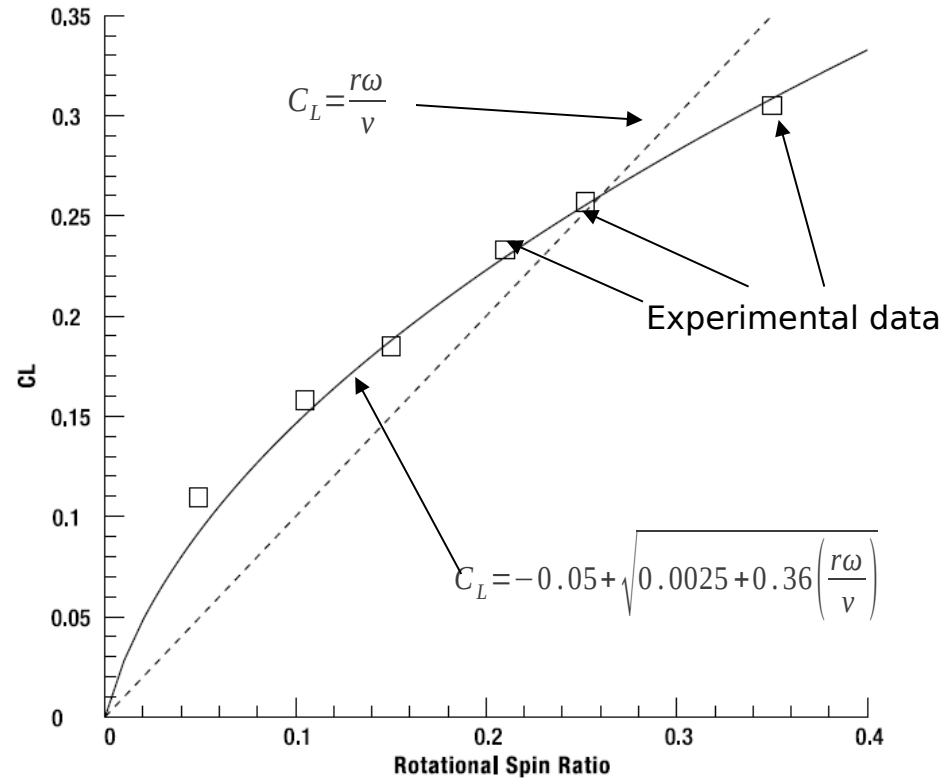


Experimental and computed lift coefficients for a standard golf ball

Sports Simulations



■ Golf

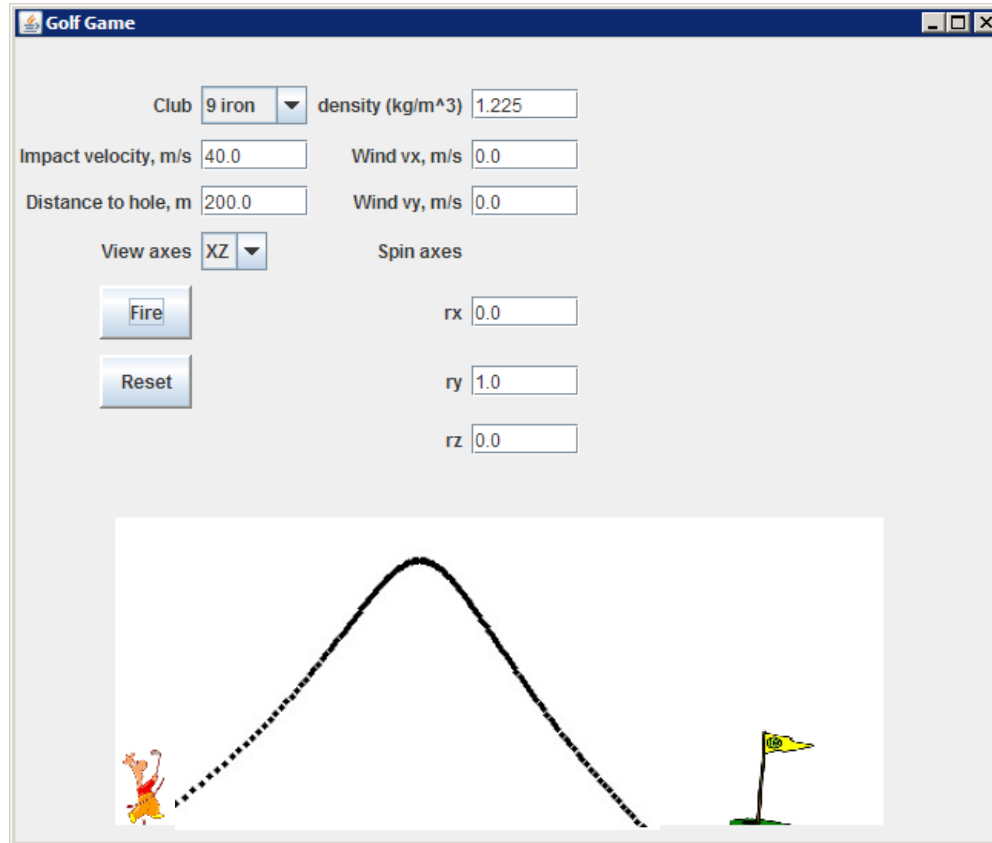


A blow-up shot results from too much spin on the ball

...Java_Code\Chapter07_Sports\GolfGame.java (from www.apress.com/book/downloadfile/2078)



Sports Simulations

- Soccer
 - Modeling the Soccer Ball in Flight
 - Laminar and Turbulent Drag

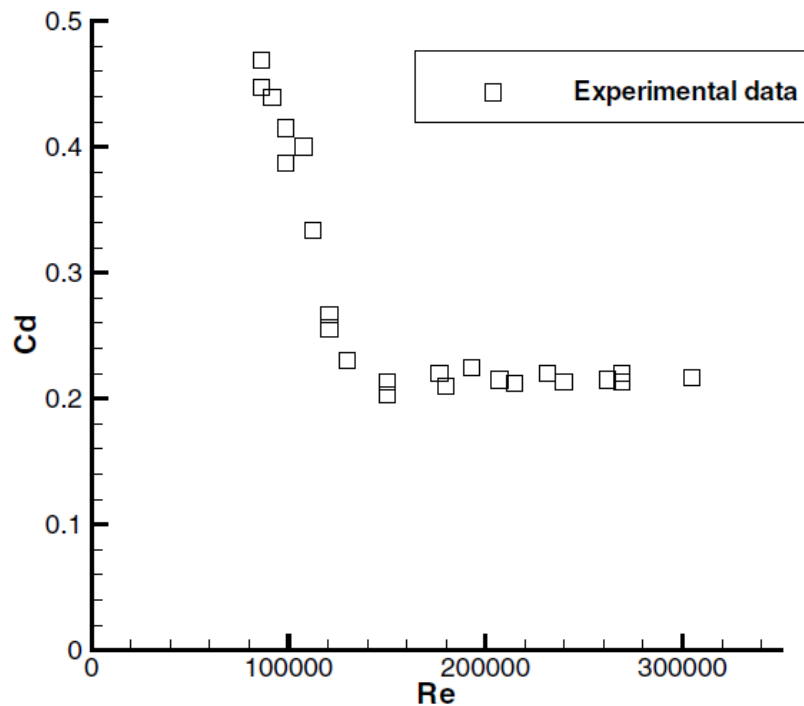

Drag coefficient of a nonspinning soccer ball

$$F_D = C_D \rho \frac{v^2}{2} A$$

The Reynolds number: $Re = \frac{\rho v L}{\mu}$

The viscosity of air: $\mu = 1.456 \cdot 10^{-6} \frac{T^{1.5}}{T + 110.4}$

$C_D = 0.47$ for $Re < 100000$

$C_D = 0.47 - 0.25 * \frac{Re - 100000}{35000}$ for $100000 < Re < 135000$


$C_D = 0.22$ for $Re > 135000$



Sports Simulations

- Soccer
 - Modeling the Soccer Ball in Flight
 - Magnus Force

$$\vec{F}_M = C_L \rho \frac{v^2}{2} A \frac{[\vec{\omega} \times \vec{v}]}{||\vec{\omega} \times \vec{v}||}$$

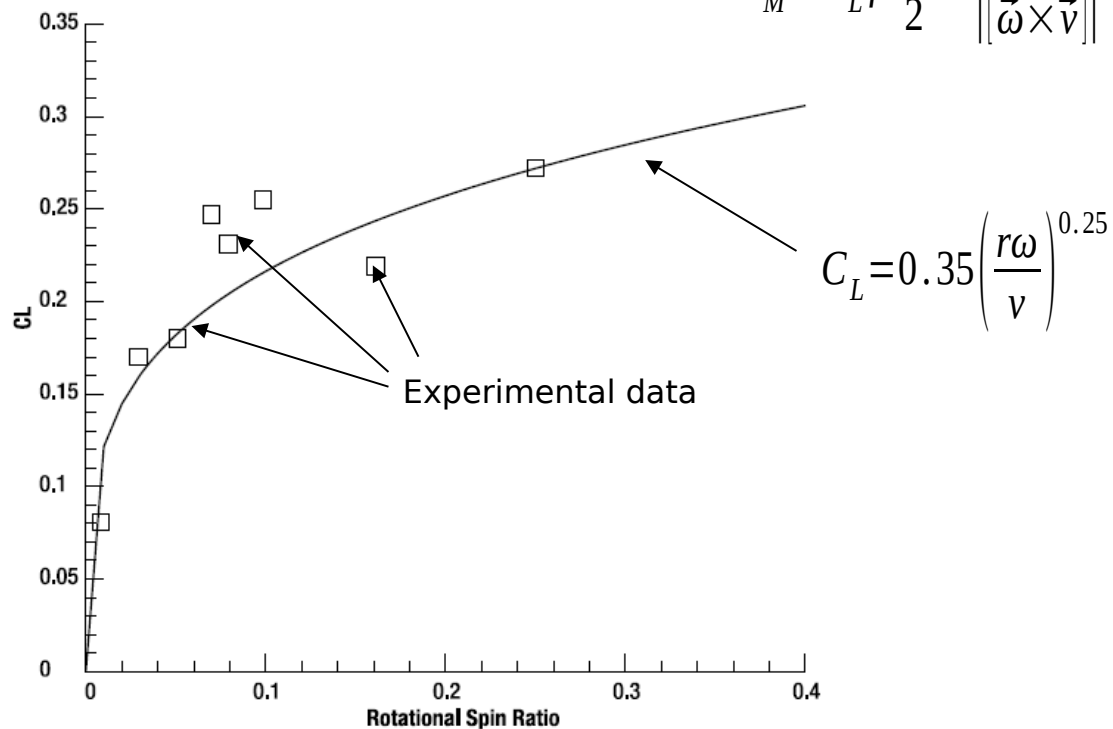

Experimental and computed soccer ball lift coefficients


Sports Simulations



- Basketball
 - Equipment Specifications

The Radius, Diameter, and Mass of Regulation Men's Basketballs

	FIBA	NBA	NCAA
Circumference (<i>m</i>)	0.78	0.749–0.762	0.76
Radius (<i>m</i>)	0.124	0.119–0.121	0.121
Mass (<i>kg</i>)	0.567–0.650	0.567–0.624	0.624

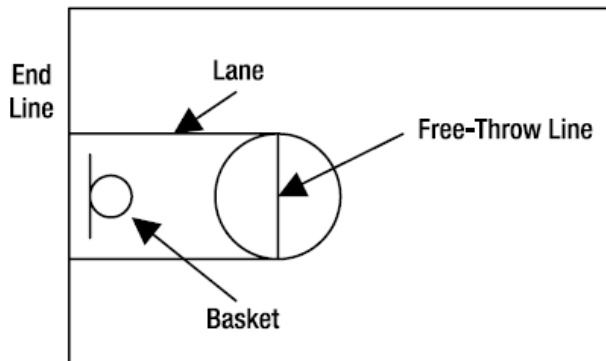

A schematic of the location of the basket, lane, and free-throw line


Court Dimensions

	FIBA	NBA	NCAA
Court length (<i>m</i>)	28	28.65	28.65
Court width (<i>m</i>)	15	15.24	15.24
Lane length (<i>m</i>)	5.8	5.79	5.79
Lane width (<i>m</i>)	6.0	4.88	3.66
3-point line distance (<i>m</i>)	6.25	6.71–7.24	6.02

Sports Simulations



- Basketball
 - Equipment Specifications

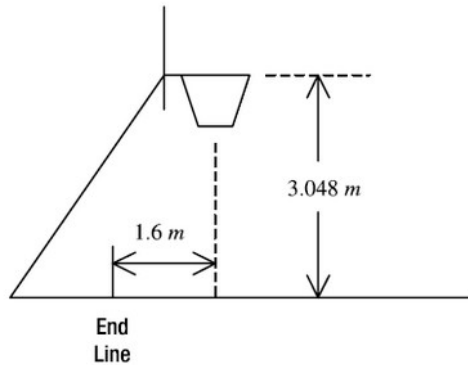

Basket and backboard schematics

Basket and Backboard Dimensions

	FIBA	NBA/NCAA
Basket inside diameter (<i>m</i>)	0.45–0.475	0.4572
Hoop diameter (<i>m</i>)	0.016–0.02	0.016–0.02
Backboard height (<i>m</i>)	1.05	1.07
Backboard width (<i>m</i>)	1.8	1.83

Sports Simulations




■ Basketball

□ Evaluating the Forces on a Basketball in Flight

Force and Acceleration Components Acting on a Basketball

Force Type	Force Value (N)	Acceleration Value (m/s^2)
Gravity	$F_g = mg = -6.08$	$a_g = g = -9.81$
Drag	$F_D = \frac{1}{2} C_D \rho v^2 A = 0.76$	$a_D = 1.23$
Spin	$F_M = \frac{1}{2} C_L \rho v^2 A = 0.23$	$a_M = 0.37$

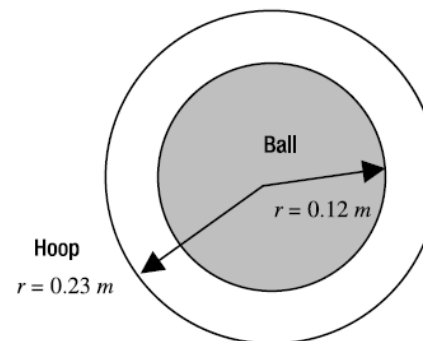

For a shot to be good, it must travel through the hoop

Sports Simulations



- **Specific of simulation of other games**
 - **Baseball**
 - **Football**
 - **Hockey**
 - **Tennis**
-

Sports Simulations



■ Summary

- When a ball (or person for that matter) is in the air, it can be treated as projectile and will be subject to the forces due to gravity, aerodynamic drag, wind, and spin.
 - The Magnus force due to spin is very important for the sports of golf, soccer, and baseball. The magnitude of the force due to spin can be obtained by determining the lift coefficient for the object in question.
 - At times the effects of wind and spin can be ignored, for example, when simulating the flight of a basketball.
 - There are also instances, for example soccer and baseball, when it is probably better for game programming purposes not to try to model the initial collision, but rather to begin the simulation by specifying the post-collision velocity, spin rate, and spin axis of the ball.
-